



## SPECIFICATIONS KOZ ST CABLE MOUNTING CLAMPS

- Application** : suitable for fitting single- and multiple-conductor low-medium- and high-voltage cables
- Range of sizes** : for cables with nominal outer diameters of 18 to 130 mm
- Testing** : tested by KEMA Netherlands and Underwriters Laboratories Inc. No mechanical loss of strength occurs within a temperature range of -40°C to +135°C.  
Fire resistance follow Norm VDE 0304, Part 3, Class II A.  
Glow Wire Tests are been done follow Norm IEC 695-2-1  
Needle Flame Tests follow Norm IEC 695-2-2
- Mechanical strength** : in ascending sizes, type ST clamp, increasing from 20,000 N to more than 40,000 N
- Stacked fitted** : ST clamps of same size can easily be mounted on top of each other, thanks to their top pieces.
- Recommended maximum tightening moment of the fastening material** : 5 Nm (also depends on cable manufacturer's instructions)
- Type** : the type indications of the ST clamps also indicate the nominal cable diameters that can be fitted in the clamps



Dimensions in millimetres

Type	DØ	L	B	I	dØ	H	h	A	Weight/Gram
KOZ ST 18-26	18-26	77	45	49	10,5	36-44	13,5	6	90
KOZ ST 26-38	26-38	92	60	60	12,5	48-60	21	10	170
KOZ ST 36-52	36-52	108	60	75	12,5	58-74	27	11	225
KOZ ST 50-75	50-75	128	60	95	12,5	76-101	35	14	310
KOZ ST 75-100	75-100	169	80	127	14,5	110-135	51	19	815
KOZ ST 100-130	100-130	200	80	158	14,5	141-170	65	20	1000

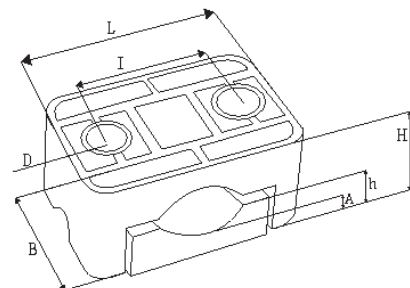

No rights may be derived from the indicated sizes, as the products are subject to ongoing development. KOZ therefore reserves the right to implement these changes without notice. For the most up-to-date information, see our Internet site: [www.kozproducts.com](http://www.kozproducts.com)

**INTERTECH**

Intertech Engineering Pty. Ltd.

Head Office  
15 Sir Laurence Drive  
Seaford, VIC 3198  
AUSTRALIA  
(P.O. Box 2117 Seaford VIC 3198)  
Phone: +61 3 9770 5000  
Fax: +61 3 9773 5886  
E-mail: [sales@intertecheng.com.au](mailto:sales@intertecheng.com.au)

[www.intertech-eng.com.au](http://www.intertech-eng.com.au)